



G128-0001



ULTRA SLIMPAK® G128-0001

DC Powered T/C Input Limit Alarm

Provides Relay Contact Closures
at a Preset Temperature Input Level



- Programmable HI or LO, Failsafe or Non-failsafe
- Field Configurable Input Ranges
- LED Trip and Input Indicators
- Flexible Power Supply Accepts 9 to 30 VDC
- ASIC Technology for Enhanced Reliability
- RoHS Compliant

Description

The Ultra Slim Pak G128 is a DIN rail mount, thermocouple input limit alarm with input terminal cold junction compensation (cjc), dual setpoints and two contact closure outputs. The field configurable input and alarm functions offer flexible setpoint capability. There are up to six temperature ranges available for each thermocouple type to ensure accuracy and maximize setpoint resolution.

The G128 is configurable as a single or dual setpoint alarm, with HI or LO trips, upscale or downscale thermocouple burnout detection and failsafe or non-failsafe operation. Also included are adjustable deadbands (0.25 to 5% of full scale input) for each setpoint and a flexible DC power supply which accepts any voltage between 9 and 30VDC.

Diagnostic LEDs

The G128 is equipped with three front panel LEDs. The dual function green LED is labeled INPUT and indicates line power and input signal status. Active DC power is indicated by an illuminated LED. If this LED is off, check DC power and the wiring connection. If the input signal is more than 110% of the full scale range, the LED will flash at 8 Hz. Below -10%, it flashes at 4 Hz. Two red LEDs indicate the relay state for each setpoint. An illuminated red LED indicates the tripped condition.

Output

The G128 is equipped with two SPDT (form C) relays, rated at 120VAC or 28VDC at 5 Amperes. Each of these relays is independently controlled by the field configurable setpoint and deadband.

Operation

The field configurable G128 limit alarm setpoints can be configured for HI or LO, failsafe or non-failsafe operation. Each of the setpoints has a respective HI or LO deadband. In a tripped condition, the setpoint is exceeded and the appropriate red LED will illuminate. The trip will reset only when the process falls below the HI deadband or rises above the LO deadband (see Figure 1). For proper deadband operation, the HI setpoint must always be set above the LO setpoint. In failsafe operation, the relay is energized when the process is below the HI setpoint or above the LO setpoint (opposite for non-failsafe). In the failsafe mode, a power failure results in an alarm state output.

Dynamic Deadband

Circuitry in the G128 prevents false trips by repeatedly sampling the input. The input must remain beyond the setpoint for 100 milliseconds, uninterrupted, to qualify as a valid trip condition. Likewise, the input must fall outside the deadband and remain there for 100 milliseconds to return the alarm to an untripped condition. This results in a "dynamic deadband" (based on time) in addition to the normal deadband.

Configuration

Unless otherwise specified, the factory presets the Model G128 as follows:

Input: J Type
Range: 0 to 350°C
Output: Dual, SPDT
Trip: A: HI, B: LO
Failsafe: No
Deadband: A, B: 0.25%

The DC power input accepts any DC source between 9 and 30V; typically a 12V or 24VDC source is used (see Accessories).

For other I/O ranges, refer to Table 1 and reconfigure switches SW1 and SW2 for the desired input type, range and function.

WARNING: Do not change switch settings with power applied. Severe damage will result!

1. With DC power off, set SW1-1, 2, 3 and SW2-1 through 6 for the desired input range (Table 1).
2. Set positions 4 and 5 of "SW1" to ON for a HI trip setpoint or OFF for a LO trip setpoint (Figure 4).
3. Set position 6 of "SW1" to ON for non-failsafe operation or OFF for failsafe operation (e.g., alarm trips upon power failure).
4. Set positions 7 and 8 of "SW1" to upscale or downscale burnout.

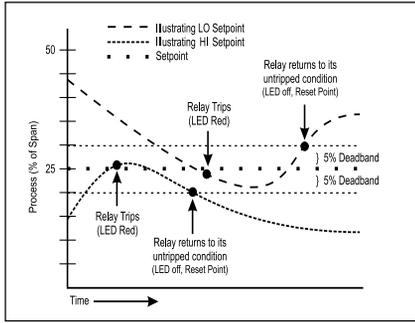


Figure 1: Limit alarm operation and effect of deadband.

Calibration

1. After configuring the DIP switches, connect the input to a calibrated TC source and apply power. Refer to the terminal wiring (Figure 5).

Note: To maximize thermal stability, final calibration should be performed in the operating installation, allowing approximately 1 to 2 hours for warm up and thermal equilibrium of the system.

2. Setpoint: set deadband at its minimum (fully counterclockwise) before adjusting the setpoint. With the desired trip thermocouple millivolt input applied, adjust the setpoint until the relay trips. For HI trip calibration, start with the setpoint above the desired trip (fully clockwise). For LO trip calibration, start below the desired trip (fully counterclockwise).

3. Deadband: Set deadband to its minimum (fully counterclockwise). Set the setpoint to the desired trip. Adjust the thermocouple millivolt input until the relay trips. Readjust deadband to 5% (fully clockwise). Set the input to the desired deadband position. Slowly adjust deadband until the relay untrips

Relay Protection & EMI Suppression

When switching inductive loads, maximum relay life and transient EMI suppression is achieved using external protection (see Figures 2 and 3). Place all protection devices directly across the load and minimize all lead lengths. For AC inductive loads, place a properly rated MOV across the load in parallel with a series RC snubber. Use a 0.01 to 0.1uF pulse film capacitor (foil polypropylene recommended) of sufficient voltage, and a 47 ohm, 1/2W carbon resistor. For DC inductive loads, place a diode across the load (PRV > DC supply, 1N4006 recommended) with (+) to cathode and (-) to anode (the RC snubber is an optional enhancement).

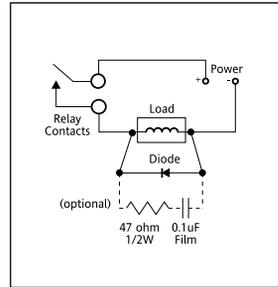


Figure 2: DC Inductive Loads

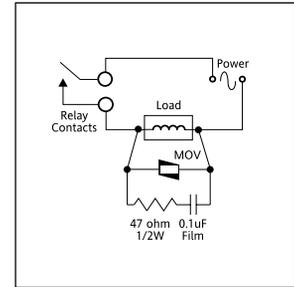


Figure 3: AC Inductive Loads

Table 1: G128 Input Range Settings

TC	Input Range	SW1		Selector SW2						
		1	2	3	1	2	3	4	5	6
B	0 to 1490 _i C (32 to 2714 _i F)	■	■							■
B	0 to 1820 _i C (32 to 3308 _i F)	■	■	■						■
E	0 to 150 _i C (32 to 302 _i F)	■								■
E	0 to 290 _i C (32 to 554 _i F)	■								■
E	0 to 660 _i C (32 to 1220 _i F)	■								■
E	0 to 1000 _i C (32 to 1832 _i F)	■								■
E	-270 to 150 _i C (-454 to 302 _i F)	■								■
E	-270 to 290 _i C (-454 to 554 _i F)	■	■	■						■
J	0 to 190 _i C (32 to 374 _i F)	■								■
J	0 to 350 _i C (32 to 662 _i F)	■	■	■						■
J	0 to 760 _i C (32 to 1400 _i F)	■								■
J	-210 to 190 _i C (-364 to 374 _i F)	■								■
J	-210 to 350 _i C (-364 to 662 _i F)	■	■	■						■
K	0 to 250 _i C (32 to 482 _i F)	■								■
K	0 to 480 _i C (32 to 896 _i F)	■	■							■
K	0 to 1280 _i C (32 to 2336 _i F)	■								■
K	0 to 1372 _i C (32 to 2502 _i F)	■	■	■						■
K	-270 to 250 _i C (-454 to 482 _i F)	■								■
K	-270 to 480 _i C (-454 to 896 _i F)	■	■	■						■
R	0 to 970 _i C (32 to 1778 _i F)	■								■
R	0 to 1690 _i C (32 to 3000 _i F)	■	■	■						■
R	0 to 1760 _i C (32 to 3200 _i F)	■								■
S	0 to 1050 _i C (32 to 1922 _i F)	■								■
S	0 to 1750 _i C (32 to 3182 _i F)	■	■	■						■
T	0 to 210 _i C (32 to 410 _i F)	■								■
T	0 to 390 _i C (32 to 734 _i F)	■	■	■						■
T	-270 to 210 _i C (-454 to 410 _i F)	■								■
T	-270 to 390 _i C (-454 to 734 _i F)	■	■	■						■

Key: ■ = 1 = ON or Closed

Table 2: G128 Trip Settings

Function	Selector SW1				
	4	5	6	7	8
Trip B HI	■				
Trip A HI		■			
Non-Failsafe			■		
Burnout Up				■	
Burnout Down					■

Key: ■ = 1 = ON or Closed

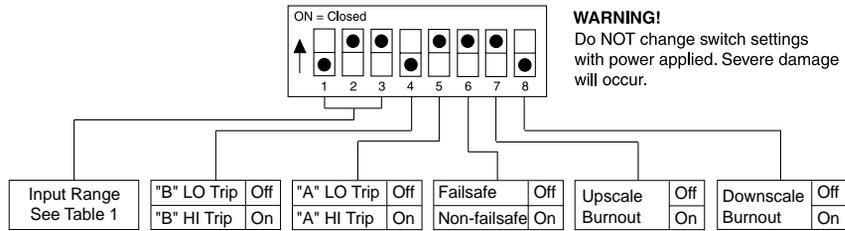


Figure 4: Input Range/Function Selection (SW1) Factory Default Settings

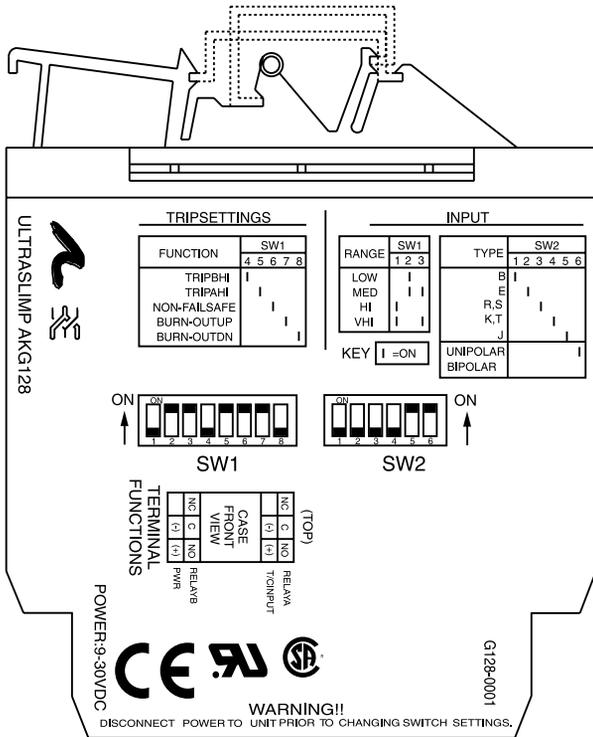


Figure 5: G128 Factory Cal: J-Type, 0 to 350°C, A-HI/B-LO, Non-failsafe

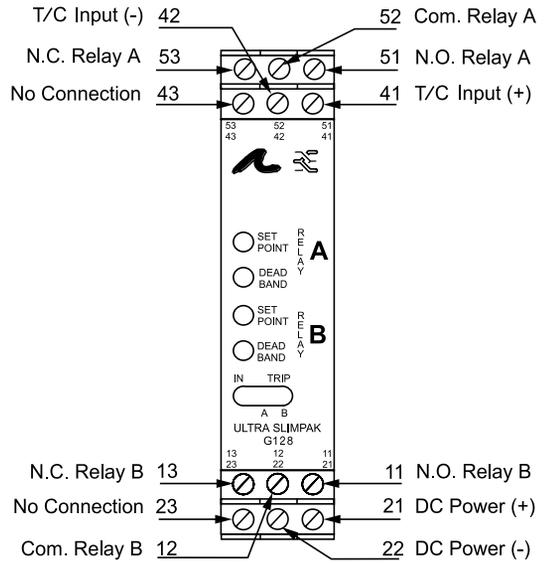


Figure 6: Wiring Diagram for G128

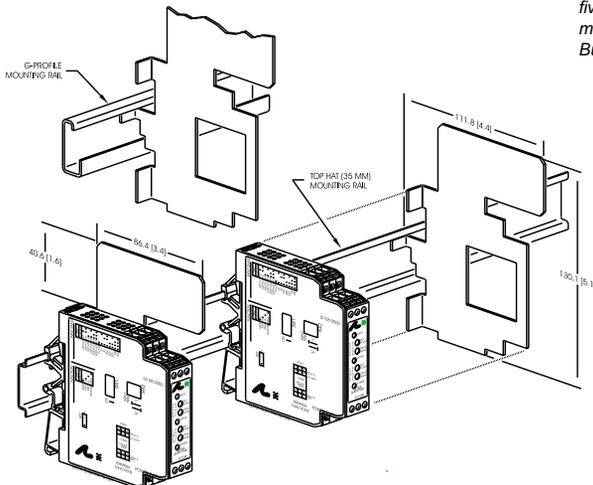


Figure 7: Mounting Multiple Modules

Note: All Ultra SlimPak modules are designed to operate in ambient temperatures from 0 to 55°C when mounted on a horizontal DIN rail. If five or more modules are mounted on a vertical rail, circulating air or model HS01 Heat Sink is recommended. Refer to HS01 Technical Bulletin (#721-0549-00) or contact the factory for assistance.

Specifications

Inputs

Range: See Table 1
Impedance: >1M Ohm
Input Bias Current (burnout detect): <1.5 uAmp
Overvoltage: ±10V differential
Common Mode (Input to Gnd): 1800VDC, max.

LED Indicators

Input Range (Green)
>110% input: 8Hz flash
<-10% input: 4Hz flash
Setpoint (Red):
Tripped: Solid red
Safe: off

Limit Differentials (Deadbands)

0.25% to 5% of span

Response Time

Dynamic Deadband:
Relay status will change when proper setpoint/process condition exists for 100msec
Normal Mode (analog filtering):
<250msec, (10-90%)

Setpoint

Effectivity:
Setpoints are adjustable over 100% of the selected input span
Repeatability (constant temp.):
0.2% for temp > 0°C
0.3% for temp < 0°C

Stability

Temperature: ±0.05% of full scale/°C, max.

Common Mode Rejection

DC to 60Hz: 120dB

Isolation

1800VDC between contacts, input & power

EMC Compliance (CE Mark)

EMC: EN61326-1:2013
Safety: EN61010-2:2013

Humidity (Non-Condensing)

Operating: 15 to 95% @45°C
Soak: 90% for 24 hours @65°C

Temperature Range

Operating: 0 to 55°C (32 to 131°F)
Storage: -15 to 70°C (5 to 158°F)

Power

Consumption: 1.5W typical, 2.5W max.
Supply Range: 9 to 30 VDC, inverter isolated

Relay Contacts

2 SPDT (2 Form C) Relays, 1 Relay per setpoint
Current Rating (resistive)
120VAC: 5A; 240VAC: 2A; 28VDC: 5A
Material: Gold flash over silver alloy
Electrical Life: 10⁵ operations at rated load
Note: External relay contact protection is required for use with inductive loads (see relay protection Figures 2 & 3).
Mechanical Life: 10⁷ operations

Wire Terminations

Screw terminations for 12-22 AWG

Weight

0.56lbs.

Agency Approvals

CSA certified per standard C22.2, No. 0-M91 and 142-M1987 (File No. LR42272)
UL recognized per standard UL508 (File No.E99775)
CE Conformance per EMC directive 2004/108/EC and Low Voltage directive 2006/95/EC.
RoHS Compliant

Ordering Information

Models & Accessories

Specify:


1. Model: **G128-0001**
2. Accessories: (see Accessories)
3. Optional Custom Factory Calibration; specify **C620** with desired input and output range.

Accessories

SlimPak "G" series modules will mount on standard TS32 (model MD02) or TS35 (model MD03) DIN rail. In addition, the following accessories are available:

HS01	Heat Sink
MD03	TS35 x 7.5 DIN Rail
WV905	24VDC Power Supply (0.5A)
H910	24VDC Power Supply (1A)
H915	24VDC Power Supply (2.3A)
MB03	End Bracket for MD03
C664	I/O Descriptive Tags

Dimensions

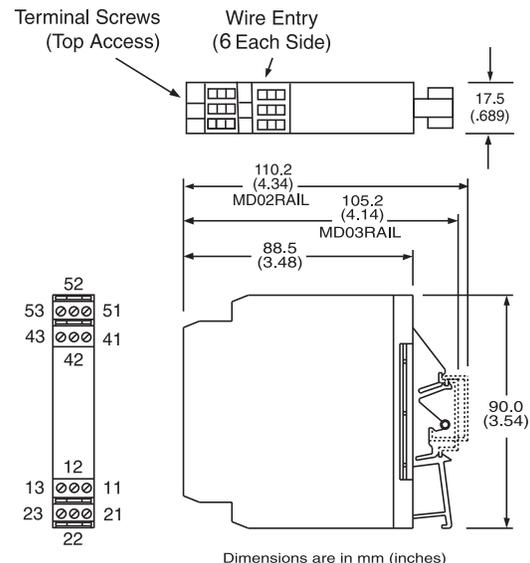

Eurotherm

by **Schneider Electric**

Schneider Electric Systems USA, Inc.

44621 Guilford Drive, Suite 100
Ashburn, VA 20147
703-724-7300

info@eurotherm.com or www.eurotherm.com/actionio



Printed on recycled paper

Factory Assistance

For additional information on calibration, operation and installation contact our Technical Services Group:

703-724-7314

actionsupport@eurotherm.com

721-0654-00-H 09/06 Copyright© Eurotherm, Inc 2006